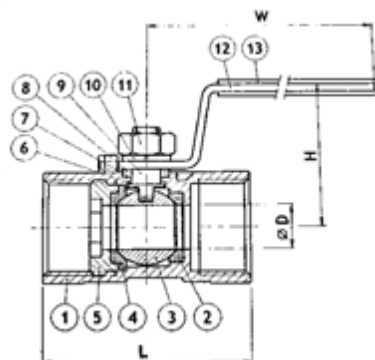




Dimension
mm


Size	inch	1/4	3/8	1/2	3/4	1	1.1/4	1.1/2	2
	mm	8	10	15	20	25	32	40	50
Bore Size		5	7	9	12.5	15	20	25	32
L		39	44	58	59	71	78	83	100
H		35	37	44	48	56	58	65	75
W		58	68	78	78	100	100	120	120

- Please name the model No. (BV-1P6, BV-1PC) when negotiation.
- The available THREAD: ANSI B2.1, BS21 or DIN-259.
- Reduce Bore.
- Investment casting body and in screwed.
- 1000PSI (69BAR) W.O.G.


Material

Model	BV-1P6	BV-1PC
1 Body	CF8M	WCB
2 Seat	PTFE	PTFE
3 Ball	CF8M	CF8M
4 Joint Gasket	PTFE	PTFE
5 Insert	S/S 316	S/S 316
6 Thrust Washer	PTFE	PTFE
7 Stem Packing	PTFE	PTFE
8 Washer	S/S 304	S/S 304
9 Stem	S/S 316	S/S 316
10 Stem Washer	S/S 304	S/S 304
11 Stem Nut	S/S 304	S/S 304
12 Handle	S/S 304	S/S 304
13 Handle Cover	PLASTIC	PLASTIC

2-PC INVESTMENT CASTING BALL VALVE (FULL BORE) 1000 WOG



BV-2PM (316)
BV-2PCM (WCB)


Dimension
mm

Size	inch	1/4	3/8	1/2	3/4	1	1.1/4	1.1/2	2	2.1/2	3
	mm	8	10	15	20	25	32	40	50	65	80
Bore Size		11.5	12.5	15	20	25	32	38	50	65	80
H		56	56	59	62	68	88	100	108	125	136
L		48.5	48.5	58	65	77	90	98	120	145	161.5
W		108	108	108	108	130	130	152	182	220	250

- Please name the model No. (BV-2P6, BV-2PC, BV-2PM, BV-2PCM) when negotiation.
- The available THREAD: ANSI B2.1, BS21 or DIN-259.
- Option: Locking Device.

Test Pressure

Body 1200 PSI (Hydrostatic)
Seat 150 PSI (Air)

Material

Model	BV-2P6	BV-2PC
Mounting Pad	BV-2PM	BV-2PCM
1 Body	CF8M	WCB A216
2 End Cap	CF8M	WCB A216
3 Ball	SS 316	SS 316
4 Seat	PTFE	PTFE
5 Joint Gasket	PTFE	PTFE
6 Thrust Washer	PTFE	PTFE
7 Stem Packing	PTFE	PTFE
8 Gland Nut	SS 304	SS 304
9 Stem	SS 316	SS 316
10 Stem Washer	SS 304	SS 304
11 Stem Nut	SS 304	SS 304
12 Handle	SS 304	SS 304
13 Handle Cover	PLASTIC	PLASTIC