




DUCTILE IRON LIFT CHECK VALVE CLASS 10K

ISO 9001

* The available Thread: BS21 or ANSI B2.1

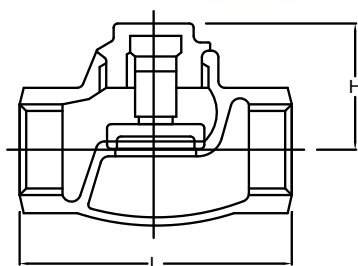

Dimension		mm					
Size	inch	1/2	3/4	1	1.1/4	1.1/2	2
	mm	15	20	25	32	35	50
L		65	80	90	105	120	140
H (open)		47	54	55	67	76	83

DG-162	Below 120°C	14 kgf/cm ²
(SUS Disc)	Below 220°C Steam, Air, Gas, Oil	10 kgf/cm ²

Test Pressure


Body	24 kgf/cm ² (Hydrostatic)
Seat	15 kgf/cm ² (Hydrostatic)
	6 kgf/cm ² (Air)

Material

Model	DG-162
Body	FCD
Cap	SUS 410 / FCD
Disc	SUS 410
Body Seat Ring	SUS 410
Spring	SUS 304

DUCTILE IRON LIFT CHECK VALVE CLASS 20K

* The available Thread: BS21 or ANSI B2.1

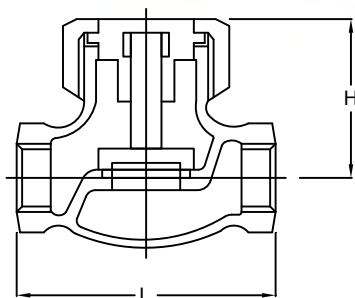

Dimension		mm					
Size	inch	1/2	3/4	1	1.1/4	1.1/2	2
	mm	15	20	25	32	40	50
L		75	90	105	120	135	160
H		55	57	63	70	76	86

DG-202	Below 120°C	28 kgf/cm ²
(SUS Disc)	Below 220°C Steam, Air, Gas, Oil	25 kgf/cm ²
	300°C Steam, Air, Gas, Oil	23 kgf/cm ²
	350°C Steam, Air, Gas, Oil	20 kgf/cm ²

Test Pressure

Body	44 kgf/cm ² (Hydrostatic)
Seat	32 kgf/cm ² (Hydrostatic)
	6 kgf/cm ² (Air)

Material

Model	DG-202
Body	FCD
Bonnet	SUS 410 / FCD
Disc	SUS 410
Bonnet Ring	SUS 410
Seat Ring	SUS 410
Gasket	ASBESTOS SHEET
Spring	SUS 304