


UM-1 Direct Mount Series


Actuator only
Weight: 1.6 kg

Mounting Pattern

Pattern	Bore Distance (P.C.D.)	Hex Head Bolt
A	Ø36(P.C.D.)	M5 x P0.8 x 12L
	Ø50(P.C.D.)	M6 x P1.0 x 15L
B	Ø50(P.C.D.)	M5 x P0.8 x 12L
	Ø70(P.C.D.)	M8 x P1.2 x 15L

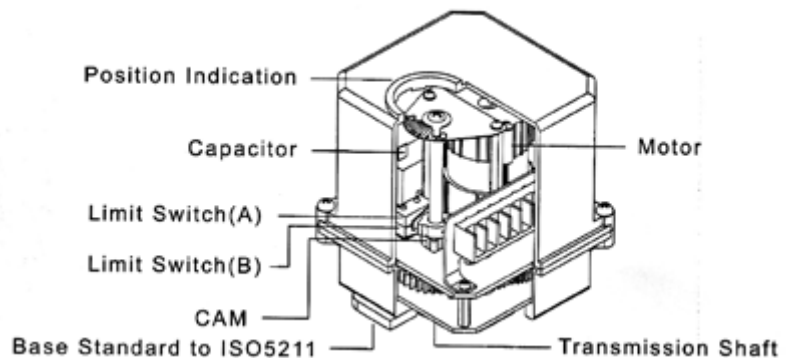

Specification				Speed (sec.)		Output Torque kgf/cm		
Power	110VAC	220VAC	24VDC	AC	DC	110VAC	220VAC	24VDC
10W	0.6A	0.3A	0.1A	10	15	350	362	400
15W	0.7A	0.4A	-	10	-	410	432	-

The Size of Valve		
Screwed Ends	Flanged Ends	3-Way Valve
1/4" ~ 1.1/2"	1/2" ~ 1"	1/2" ~ 1.1/2"

Dimension

Series	A	B	C	D	E	F	G	H	I	J	K	L Max	M	N	ISO 5211
UM-1	118	145	8	140	19.3	36	M5	4	M6	4	50	14.03	19	45°	F03 F05

* Action interval: 5 minutes per travel.

