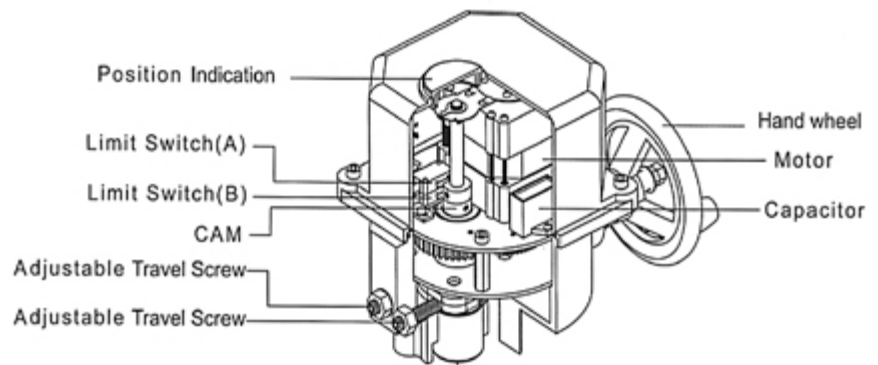


UM-3-1 Direct Mount Series


Specification				Speed (sec.)		Output Torque kgf/cm		
Power	110VAC	220VAC	24VDC	AC	DC	110VAC	220VAC	24VDC
25W	0.8A	0.6A	-	1	-	294	350	-
				8		1486	1562	
30W	-	-	0.3A	-	1	-	-	500
					8			1500


Actuator only
Weight: 7.5 kgs

The Size of Valve			
Screwed Ends	Flanged Ends	Butterfly Valve	3-Way Valve
1.1/4" ~ 3"	1.1/4" ~ 3"	2" ~ 5"	2.1/2"

Dimension

Series	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	ISO5211
UM-3-1	310	218	30	249	203	23.5	70	M8	4	17	45°	173	87	42	59	180	165	F07


* Action interval: 5 minutes per travel.

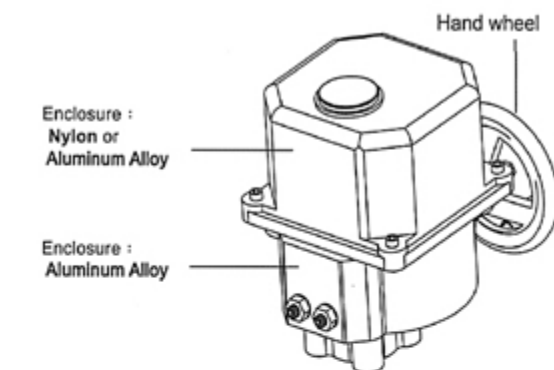

Bushing
(Outside Square diagonal is 17mm.
Inside square diagonal is 14mm)

Washer(M8)x4

Hex head bolt
(M8)x4
(The screw size
is depending on
mounting pattern,
available screw
over 10mm)

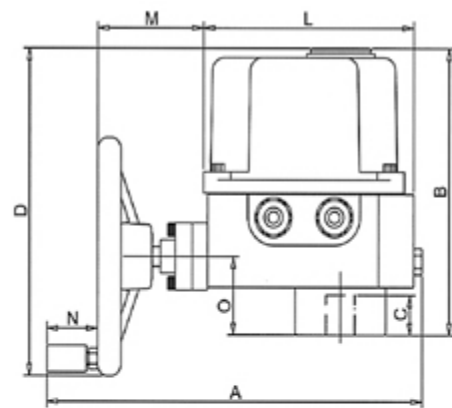

*The UM-3-1/24VDC is over
standard height 26mm.

