


UM-5 Direct Mount Series


Actuator only
Weight: 10 kgs

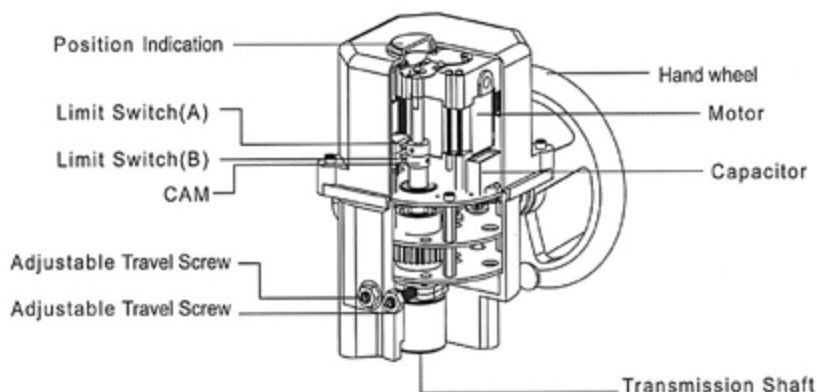

Specification			Speed (sec.)		Output Torque kgf/cm	
Power	110VAC	220VAC	AC	DC	110VAC	220VAC
40W	0.9A	0.6A	30	-	4266	4873

The Size of Valve		
Flanged Ends	Butterfly Valve	3-Way Valve
4" ~ 5"	8" ~ 10"	3" ~ 4"

Dimension
mm

Series	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	ISO5211
UM-5	310	276	34	274	203	36.5	125	27	M12	4	45°	165	180	42	87	173	92	102	M10	4	F10 / F12

* Action interval: 5 minutes per travel.

